

582474 (L-VJM20A/EN) 20 W Unidirectional Sound Projector

- ✓ **Intelligible voice and superior sound reproduction**
- ✓ **Ceiling or wall mount**
- ✓ **Meets virtually any outdoor requirements**
- ✓ **Water and dust protected to IP65**
- ✓ **Complies with EN 54-24 standard**



General

This loudspeaker is a high-performance 20 W voice alarm unidirectional sound projector. It provides a broad frequency response range, low distortion and high sound pressure level for accurate and intelligible broadcast of evacuation messages and high quality sound reproduction. It can be used in indoor, outdoor, dry, or wet applications, providing reliable operations over wide temperature and humidity ranges. Its low-profile, white color design blends easily with most interiors in locations such as hotels, conference rooms, cinemas, theme parks, factories and exhibitions.

This voice alarm unidirectional sound projector complies with BS 5839 part 8 and is certified according to EN 54 part 24.

With Transformer: 100 V / 70 V line

	Red	Green	Blue	White	Black
100 V	20 W	10 W	5 W	2.5 W	Com
70 V	10 W	5 W	2.5 W	1.25 W	Com
IMP (Ω)	500	1 K	2 K	4 K	

Dispersion Angles

		Horizontal	Vertical
1 oct pink noise	500 Hz	360 °	360 °
1 oct pink noise	1 kHz	214 °	219 °
1 oct pink noise	2 kHz	116 °	116 °
1 oct pink noise	4 kHz	57 °	58 °

Mounting


A durable bracket is provided for quick installation and flexible angle adjustment. Besides, this unidirectional loudspeaker can be ceiling mount with a bracket.

Power setting


The product comes with a one meter, fire resistant six core cable already attached to the ceramic connector. The cable is a bundle of wires color coordinated corresponding to the different power taps of the transformer. The cable connector is mounted on the back cover for easy installation.

Frequency Response


Frequency response at 100 V / 4 m / 1/3 oct. smoothing

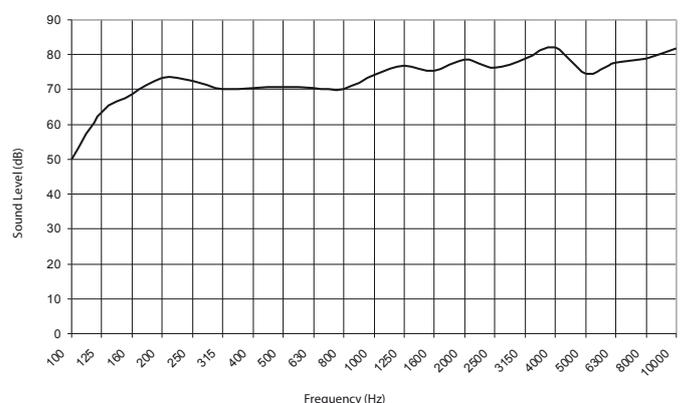

Dimensions

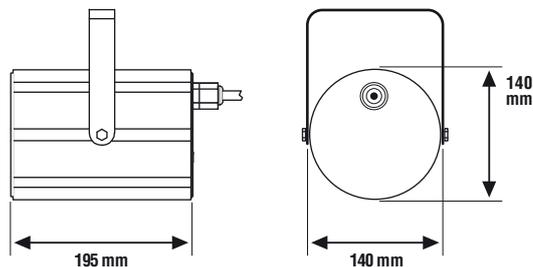

Circuit Diagram

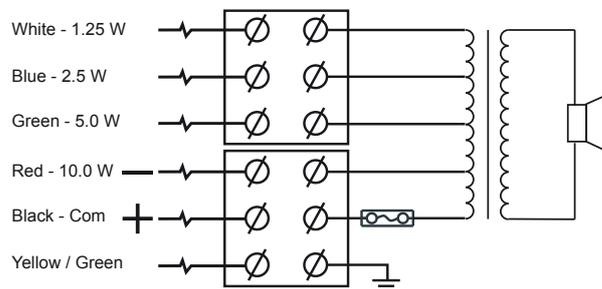

Specifications

Max. power	30 W
Rated power	20 W
Power tapping	20 W / 10 W / 5 W / 2.5 W
SPL @ 1 W / 1 m (100 Hz ~ 10 kHz)	89 dB
SPL @ 20 W / 4 m (100 Hz ~ 10 kHz)	89 dB
Frequency range (- 10 dB)	150 Hz ~ 20 kHz
Rated input voltage	100 V / 70 V
Rated impedance	500 Ω / 1 k Ω / 2 k Ω / 4 k Ω
Connection	Fire resistant cable
Dimensions	Ø 140 mm x 140 mm x 195 mm
Diameter of speakers	5.25 "
Weight	2.65 kg
Color	White similar to (RAL 9003)
Material	Aluminium
IP rating	IP 65
Operating temperature	- 25 °C ... + 55 °C
Storage temperature	- 40 °C ... + 70 °C
Relative humidity	< 95 %

Order information

Part No.

10 W unidirectional sound projector	582474
Type	L-VJM20A/EN
DoP number	CPR-DoP-2013003

Additional order information can be found in the product catalog "VAPA System VARIODYN D1"

* The reference axis is perpendicular to the centre point of the front grille

* The reference plane is perpendicular to the centre of the reference axis

* The horizontal plane is perpendicular to the centre of the reference plane

* The spec/date was measured using a standard baffle mounting in an anechoic chamber as described in EN 54-24